


# Ostro      D Hacker

A  
(Unten Solder)
Platine
B  
(oben Komponenten)

	22	
	21	leer
	20	Zähler
	19	Zähler
	18	leer
	17	leer
leer	16	Schuss 2. Sp
	15	Links 2. Sp
	14	Rechts 2. Sp
	13	Schuss 1. Sp
	12	Links 1. Sp
	11	Rechts 1. Sp
	10	2. Spieler Start
Gemeinsam Schalter Allg.	9	1. Spieler Start
leer	8	leer
Ruhe Kontakt Münzsch.	7	Münzschalter Arbeitskontakt.
Gemeinsam Münzsch. Masse	6	Lautsprecher ⊕
Masse	5	Video Synchron
Video Blau	4	Video Grün
Video Rot	3	leer
Video Masse	2	leer
Masse	1	leer
Masse	1	Lautsprecher ⊖ Masse

## Speisungsstecker auf Elektronite

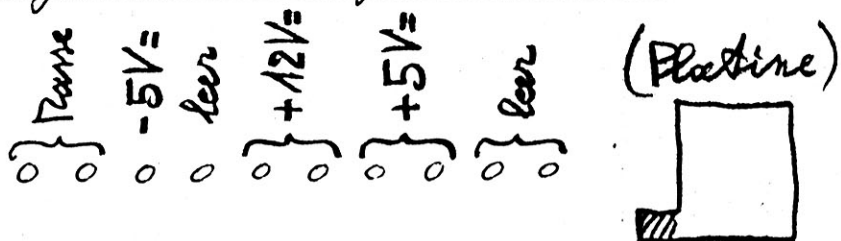

Set the charge to your shop.

Set the number of bonus point.

Set other requirements if necessary (see the under the table)

Connect the power supply cord carefully not to interfere with feet of customers.

Close the power switch.

## *Astro Attacker*

### FUNCTIONS OF DIP SWITCH

TEST	BONUS		CREDIT		SPACE SHIP		REVERSE
1	2	3	4	5	6	7	8
ON	ON	ON	ON	ON	ON	ON	ON
	5000pts		1 Coin 1 Play		3 Ships		(Non) STAND TYPE
	ON	OFF	ON	OFF	ON	OFF	× OFF
	7000pts		1 Coin 2 Play		4 Ships		(Yes) TABLE TYPE
	× OFF	× ON	OFF	ON	× OFF	× ON	
	10,000pts		2 Coin 1 Play		5 Ships		
	OFF	OFF	OFF	OFF	OFF	OFF	
	0 pt		2 Coin 1 Play		6 Ships		