



RAIDEN DX

**DX**



取扱説明書

OPERATOR'S MANUAL

SEIBU KAIHATSU INC.,

# 雷電DX

## 取扱説明書

OPERATOR'S MANUAL

### ●仕様


○エッジコネクター EDGE CONNECTOR

SOLDER SIDE(半田面)	NO	NO	PARTS SIDE(部品面)
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
	E	5	
+12V	F	6	+12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
	K	9	
SPEAKER(-)	L	10	SPEAKER(+)
	M	11	
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	
COIN IN 2	T	16	COIN IN 1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P PUSH 1	Z	22	1P PUSH 1
2P PUSH 2	a	23	1P PUSH 2
	b	24	
	c	25	
	d	26	
GND	e	27	GND
GND	f	28	GND

○JAMMA規格 JAMMA STANDARD

○タテ画面 VERTICAL SCREEN

○コントロールパネル CONTROL PANEL

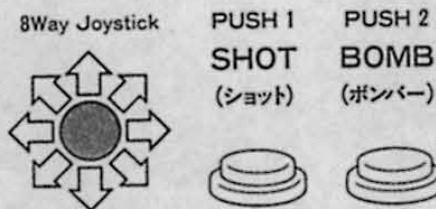


○電源 POWER SOURCE

+5V.....5A

+12V.....1A

(PARTS SIDE)

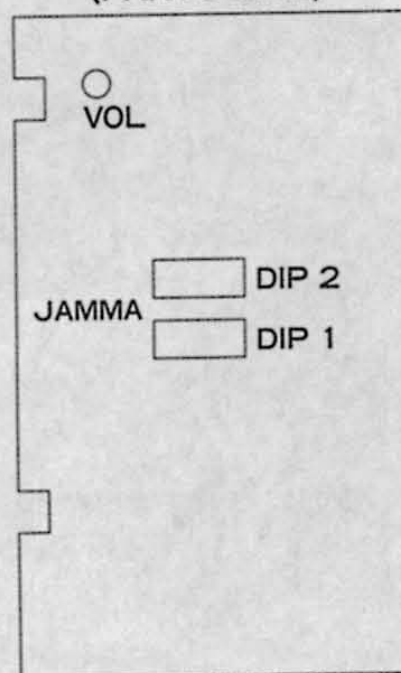



## 注意事項

1. PCボードの取り付け、取り外しは必ず電源を切ってから行って下さい。
2. 本ボードに張ってあるシリアルナンバーシールを剥がした場合や、無断で改造した場合には、故障に際して保障期間内であっても有償又は対象外となります。
3. 回路は一部バッテリーバックアップされており、テスターなどで導通検査などをするとショートの原因になりますので絶対に御止め下さい。また絶対にバッテリーは外さないで下さい。
4. PCボードを輸送する際には、スポンジやエアキャップなどで包み、段ボール箱などに入れ強い衝撃を加えないようご注意下さい。

## POINTS OF CAUTION

1. Always make sure the power is turned off before installing or removing a PC board.
2. If the serial number seal affixed to this board has been removed, or alteration without consent has been made, then in the case of malfunction, even within any warranty period, will result in loss of subjection to warranty or onus.
3. The circuits have been partly battery backed-up. Please desist from carrying out conductivity inspections with such tools as circuit testers as these can cause short circuits. And never remove the batteries.
4. When transporting PC boards, please wrap them in sponge rubber or bubble wrap and place them in cardboard boxes. Take care to prevent exposure to strong shocks or jolts.

SEIBU KAIHATSU INC.,  
有限会社 **セイブ開発**

〒101 東京都千代田区三崎町2-20-1

2-20-1 Misaki-Cho Chiyoda-Ku, Tokyo 101

TEL. 03(3238)9169

FAX. 03(3238)9187