

PITFALL (834-5627)

COIN/CREDIT OPTIONS SWITCH SETTING

DIP SWITCH #A

OPTION		1	2	3	4	5	6	7	8
1 COIN 1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN 2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
1 COIN 3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN 4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
1 COIN 5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN 6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
2 COINS 1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
3 COINS 1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
4 COINS 1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON
2 COINS 3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON
2 COINS 1 CREDIT									
4 COINS 2 CREDITS	OFF	ON	OFF	ON	OFF	ON	OFF	ON	
5 COINS 3 CREDITS									
6 COINS 4 CREDITS									
2 COINS 1 CREDIT	ON	ON	OFF	ON	ON	ON	ON	OFF	ON
4 COINS 2 CREDITS									
1 COIN 1 CREDIT									
2 COINS 2 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON	
3 COINS 3 CREDITS									
4 COINS 4 CREDITS									
5 COINS 6 CREDITS									
1 COIN 1 CREDIT									
2 COINS 2 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON	ON
3 COINS 3 CREDITS									
4 COINS 5 CREDITS									
1 COIN 1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON	ON
2 COINS 3 CREDITS									
1 COIN 1 CREDIT	ON	ON	ON	ON	ON	ON	ON	ON	ON


COIN SWITCH #1

COIN SWITCH #2

OPTION SWITCH SETTING

DIP SWITCH #B

OPTION		1	2	3	4	5	6	7	8
TABLE UPRIGHT	OFF	ON							
ADVERTISE SOUND	OFF		OFF						
	ON		ON						
NUMBER OF PLAYERS	3 MEN			OFF	OFF				
	4 MEN			ON	ON				
	5 MEN			ON	ON				
	FREE			ON	ON				ON
SCORE OF ADDITIONAL PLAYERS	20000&50000					OFF			
	30000&70000					ON			
NOT CONTINUE							OFF		
CONTINUE							ON		
GAME DIFFICULTY	NORMAL							OFF	
	HARD							ON	




BARE BD No.

171-5034

171-5054



171-5054-01



BARE BD No.

171-5054-02

44PIN P=3.96mm

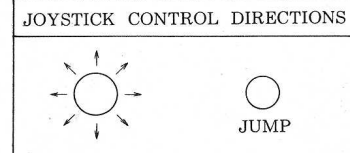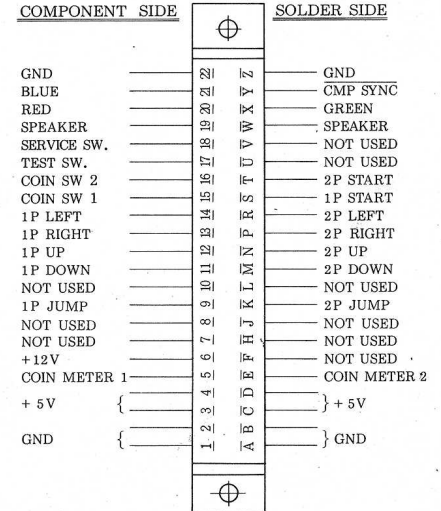

SUPPLY VOLTAGES & CURRENT	
VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25 A



FLIPPERSPILL.COM