

4yuss

~~BYUSS~~

DIP SWITCH SETTING (1 of 3)

A. DIP 1 SWITCH SET

1. COIN 1 SWITCH SET

SW	4	3	2	1	COIN	PLAY
	OFF	OFF	OFF	OFF	1	1
			OFF	ON	1	2
			ON	OFF	1	3
			ON	ON	1	4
	OFF	ON	OFF	OFF	1	5
			OFF	ON	1	6
			ON	OFF	1	7
			ON	ON	2	1
	ON	OFF	OFF	OFF	2	3
			OFF	ON	2	5
			ON	OFF	3	1
			ON	ON	3	2
	ON	ON	OFF	OFF	3	4
			OFF	ON	4	1
			ON	OFF	4	3
			ON	ON	FREE PLAY	

(ATTENTION) FREE PLAY MEANS THE SITUATION, YOU CAN PLAY WITHOUT PUTTING ANY COINS IN.

2. COIN 2 SWITCH SET

SW	8	7	6	5	COIN	PLAY
	OFF	OFF	OFF	OFF	1	1
			OFF	ON	1	2
			ON	OFF	1	3
			ON	ON	1	4
	OFF	ON	OFF	OFF	1	5
			OFF	ON	1	6
			ON	OFF	1	7
			ON	ON	2	1
	ON	OFF	OFF	OFF	2	3
			OFF	ON	2	5
			ON	OFF	3	1
			ON	ON	3	2
	ON	ON	OFF	OFF	3	4
			OFF	ON	4	1
			ON	OFF	4	3
			ON	ON	FREE PLAY	




58.5.9



LEFT 8Ω
6W (MIN)

A IS SOLDER SIDE
B IS PARTS SIDE

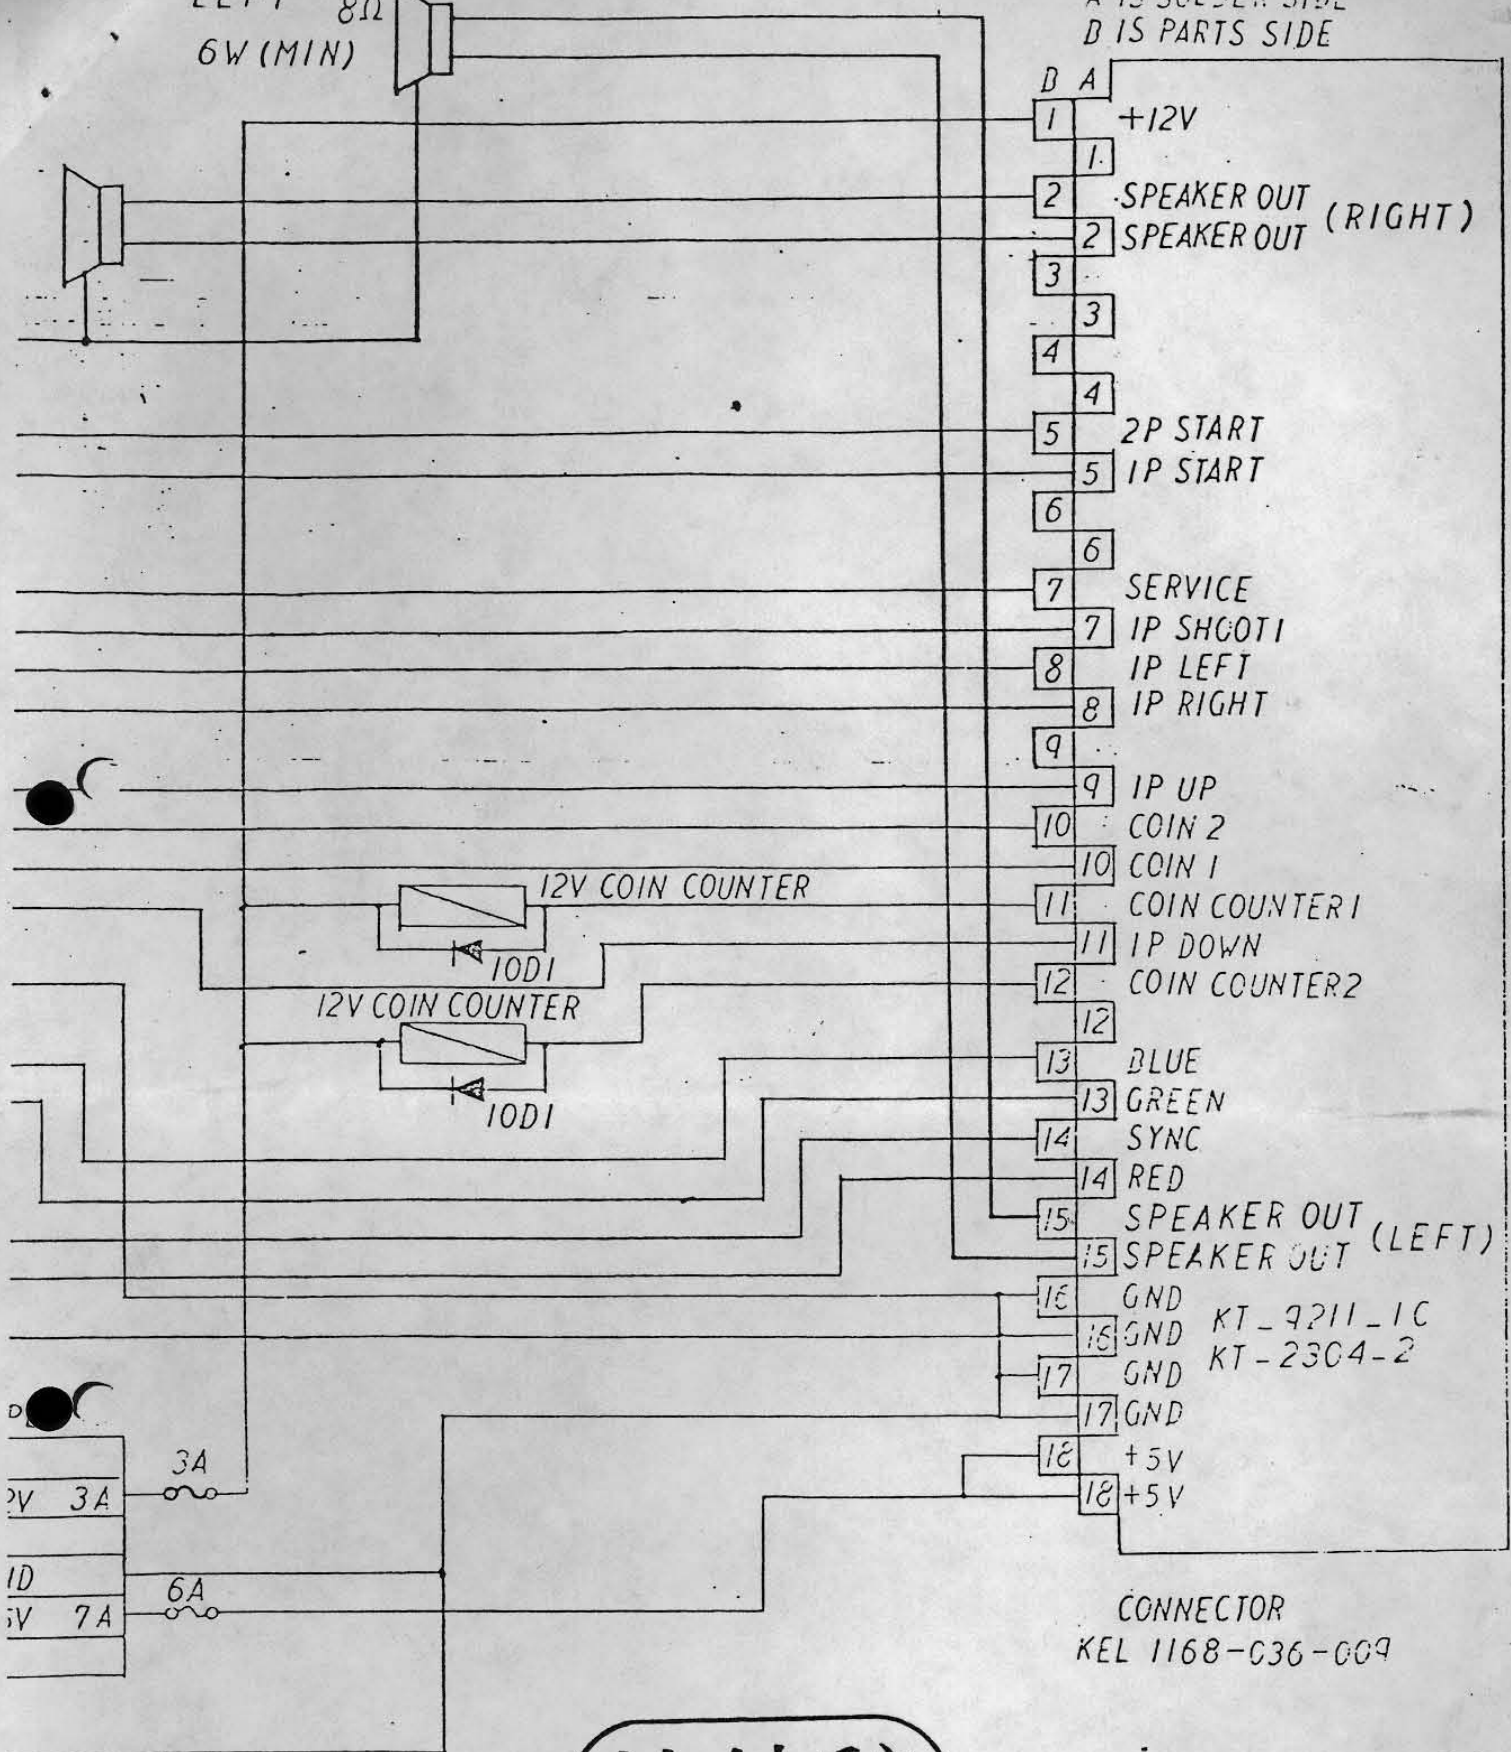

CONNECTOR
KEL 1168-C36-009

社外秘

UP RIGHT TYPE
58.5.9

開一課
58.5-7
酒井

名	KT-9211-1C		
称	GENERAL WIRING DIAGRAM		
图	AC INPUT 240V, 220V, 115V		
番			
版	年月日	設計	調査
			変更内容

富士通株式会社

B. DIP 2 SWITCH SET

(2 of 3)

1. THE NUMBER OF PLAYER

SW	1	2	NUMBER
<input type="radio"/>	OFF	OFF	3
	ON	OFF	4
	OFF	ON	5
	ON	ON	2 5 5

2. TYPE OF GAME

SW	3	TYPE	USING 1/0
	OFF	TABLE	1 OR 2 PLAYERS
	ON	UP LIGHT	ONLY 1 PLAYER

3. BONUS SET

SW	4	BONUS POINTS
<input type="radio"/>	OFF	30000PTS AND AFTER EVERY 70000PTS
	ON	40000PTS AND AFTER EVERY 80000PTS

4.

SW	5	6	7	
	ON	ON	OFF	

5. SOUND IN ATTRACTIVE MODE

SW	8	SOUND IN ATTRACTIVE MODE
	OFF	SOUND OFF
	ON	SOUND ON

(NOTE) SHOWS NORMAL SETTING.

Handwritten notes and diagrams, including a small schematic of a switch and some illegible text.



C. DIP 3 SWITCH SET (3 of 3)
1. MUSIC IN ATTRACTIVE MODE

SW	1	MUSIC IN ATTRACTIVE MODE
	OFF	SOUND OFF
	ON	SOUND ON

