

T E T R I S (Japan)  
 =====

WIRING DIAGRAM  
 -----


SOLIDER SIDE  
 -----

PART SIDE  
 -----

GND 1  
 GND 2  
 + 5V 3  
 + 5V 4  
 5  
 + 12V 6  
 7  
 8  
 9  
 SPEAKER (+) 10  
 11  
 VIDEO GREEN 12  
 VIDEO SYNC 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 GND 27  
 GND 28

GND  
 GND  
 + 5V  
 + 5V  
 +12V  
 Speaker (-)  
 VIDEO RED  
 VIDEO BLUE  
 VIDEO GND  
 COIN SWITCH 1  
 BOMB  
 DOWN  
 LEFT  
 RIGHT  
 PUSH  
 START  
 GND  
 GND

} JOYSTICK

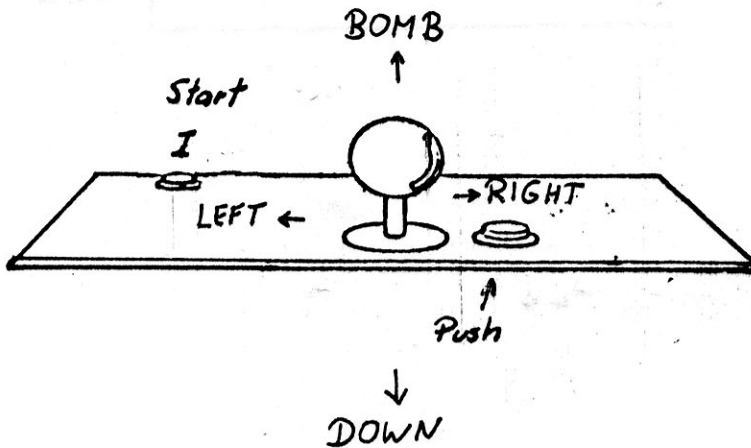

DIAGRAM

D I P SWITCH

		1	2	3	4	5	6	7	8
DIFFICULTY	LEVEL 0	OFF	OFF						
	LEVEL 2	ON	OFF						
	LEVEL 4	OFF	ON						
	LEVEL 6	ON	ON						
B O M B	Y E S			OFF					
	N O N E			ON					
M E L O D Y	Y E S				ON				
	N O N E				OFF				
C O I N	1COIN / 1CREDIT							OFF	OFF
	1COIN / 2CREDIT							ON	OFF
	2COIN / 1CREDIT							OFF	ON
	2COIN / 1CREDIT							ON	ON

