

PITFALL (834-5627)

COIN/CREDIT OPTIONS SWITCH SETTING


OPTION		DIP SWITCH #A							
		1	2	3	4	5	6	7	8
1 COIN 1 CREDIT		OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN 2 CREDITS		ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN 3 CREDITS		OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN 4 CREDITS		ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 COIN 5 CREDITS		OFF	OFF	ON	OFF	OFF	ON	ON	OFF
1 COIN 6 CREDITS		ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 COINS 1 CREDIT		OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 COINS 1 CREDIT		ON	ON	ON	OFF	ON	ON	ON	OFF
4 COINS 1 CREDIT		OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 COINS 3 CREDITS		ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 COINS 1 CREDIT									
4 COINS 2 CREDITS		OFF	ON	OFF	ON	OFF	ON	OFF	ON
5 COINS 3 CREDITS									
6 COINS 4 CREDITS									
2 COINS 1 CREDIT		ON	ON	OFF	ON	ON	ON	OFF	ON
4 COINS 2 CREDITS									
1 COIN 1 CREDIT									
2 COINS 2 CREDITS		OFF	OFF	ON	ON	OFF	OFF	ON	ON
3 COINS 3 CREDITS									
4 COINS 4 CREDITS									
5 COINS 5 CREDITS									
1 COIN 1 CREDIT		ON	OFF	ON	ON	ON	OFF	ON	ON
2 COINS 2 CREDITS									
3 COINS 3 CREDITS									
4 COINS 5 CREDITS									
1 COIN 1 CREDIT		OFF	ON	ON	ON	OFF	ON	ON	ON
2 COINS 3 CREDITS									
1 COIN 1 CREDIT		ON	ON	ON	ON	ON	ON	ON	ON

COIN SWITCH #1


COIN SWITCH #2

OPTION SWITCH SETTING



OPTION		DIP SWITCH #B							
		1	2	3	4	5	6	7	8
TABLE UPRIGHT		OFF							
ADVERTISE SOUND	OFF ON		OFF ON						
NUMBER OF PLAYERS	3 MEN 4 MEN 5 MEN FREE			OFF ON OFF ON	OFF ON ON ON				ON
SCORE OF ADDITIONAL PLAYERS	20000&50000 30000&70000					OFF ON			
NOT CONTINUE CONTINUE							OFF ON		
GAME DIFFICULTY	NORMAL HARD							OFF ON	



BARE BD No.
171-5034
171-5054
171-5054-01



BARE BD No.
171-5054-02

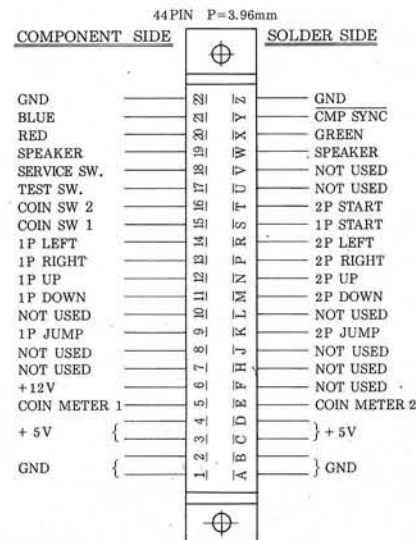

SUPPLY VOLTAGES & CURRENT

VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25 A